# NEW GENERATION SUPER DIODE LASER HAIR REMOVAL MACHINE







2000w High Power

Super Short Pulse Duration







Real-time monitoring of the surface temperature of the handle.



### SAPPHIRE CRYSTAL

Best light and cold conductivity, ensuring the effectiveness and comfort of the treatment.

01

### AMERICAN COHERENT LASER BAR

100 million shots warranty.



### 360° COOLING PELTIER

108w super cooling power, the surface temperature of the spot can reach -30°C.




02

### COLLIMATORLENS FOCUS BEAM


Collimate the light path, reduce the divergence angle of the beam, and turn the divergent light path into a parallel light path.





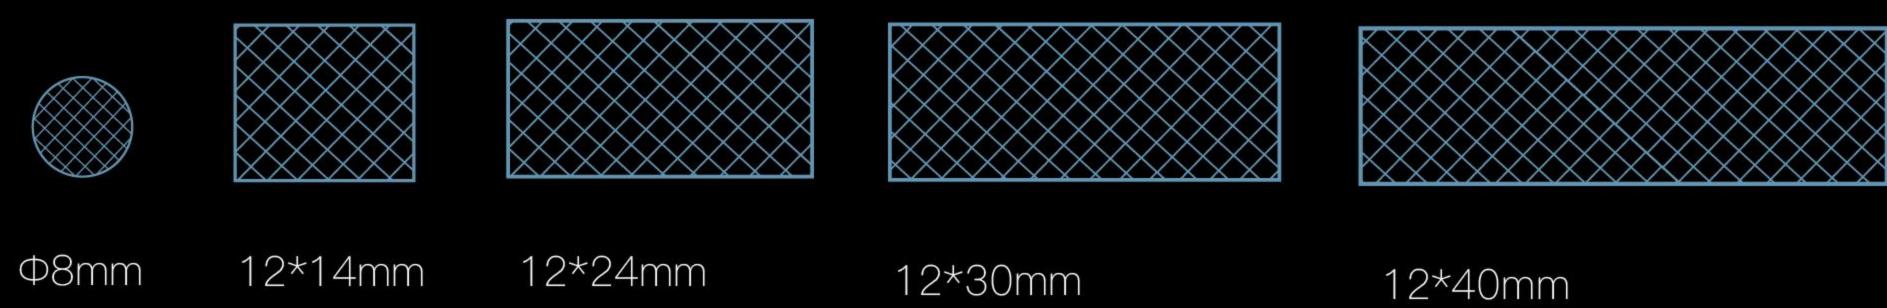

## 2000W HIGH POWER



**MULTIPLE SPECIFICATIONS TREATMENT HEAD** 

A variety of different powers and different spot sizes are available to meet the treatment needs of different parts of the customer.



### TOUCH SCREEN HANDLE

1.54—inch high-definition OLED touch screen, treatment parameters can be adjusted directly on the handle screen.



 $\prod$ 

Frequency Adjustment

Energy Adjustment

Pulse Width Adjustment



### **IDENTIFIABILITY**

The system can recognize different treatment heads automatically.




### **LIGHTWEIGHT**

The handle weighs only 750g, with humanized design, light and labor-saving

### 360° COOLING PELTIER


Cooling reaches -27.0°C in 2 minutes.



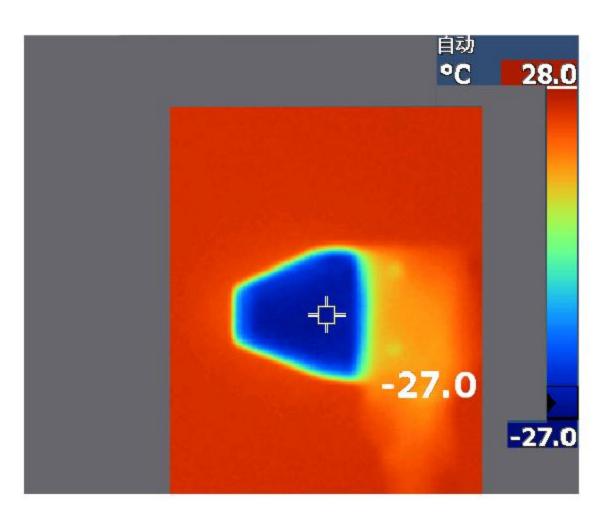

### **UNIFORM LIGHT SPOT**

Uniform light spot, more safer and effective.

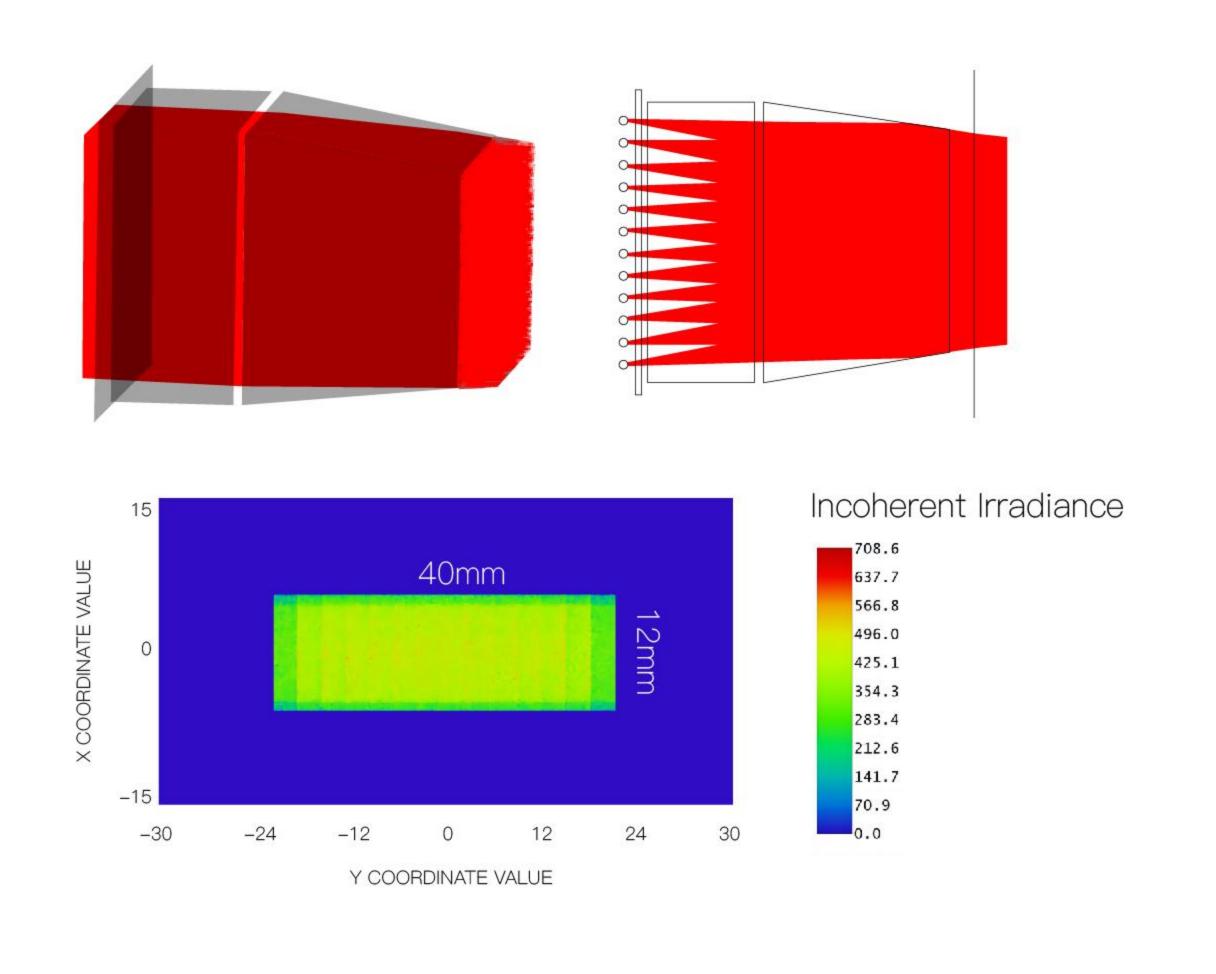

### HAIR DETECTION TO INTELLIGENTLY



Unique al diode laser technology, equipped with hair detection the results of each treatment are visible to be seen.

## Before After one treatment After two treatments








### ACTUAL EFFECT OF DEPILATION

LEGS



ARMPIT

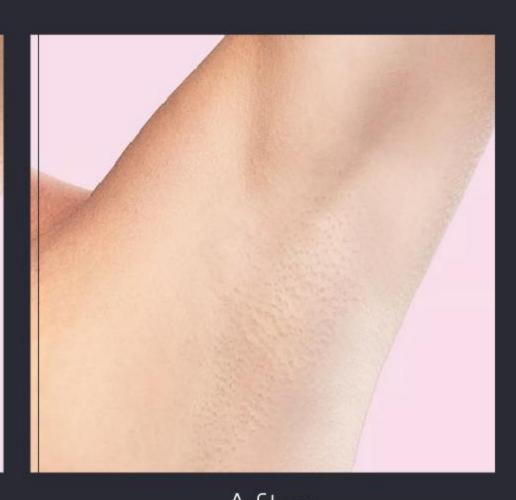

Before

After

Before

BIKINI


After

### BACK







LIP

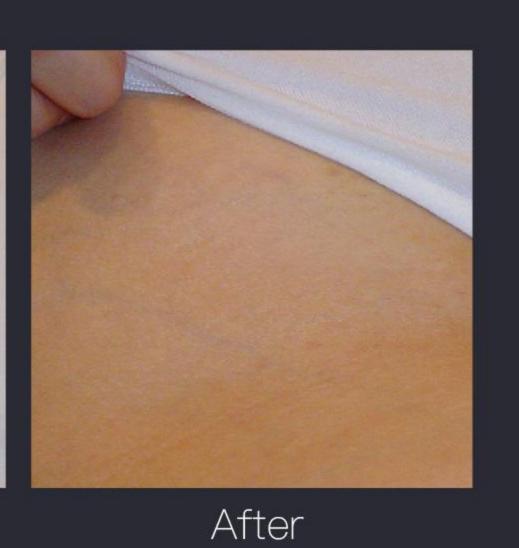


CHEEK



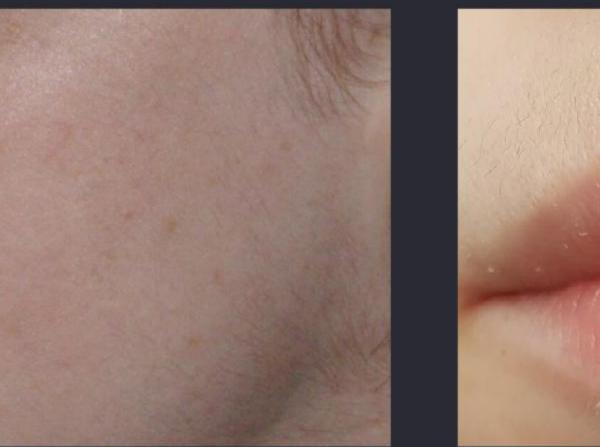

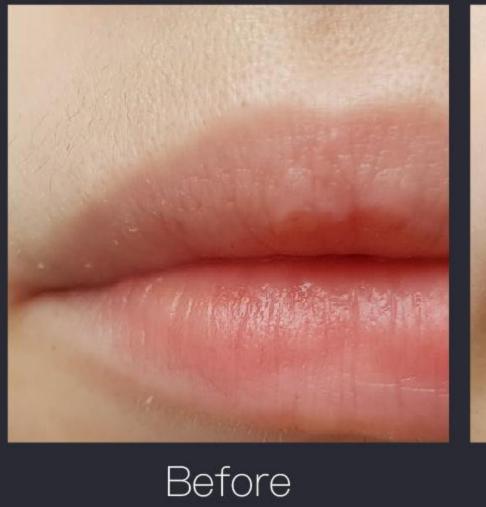

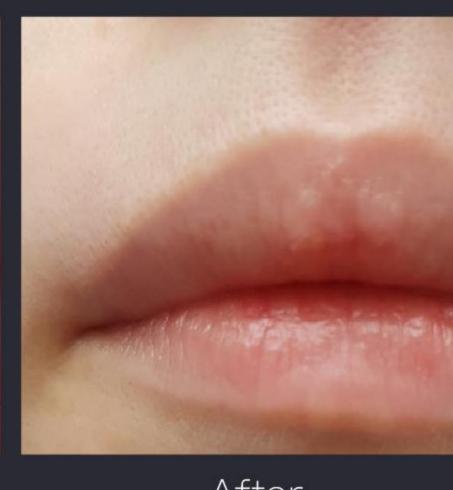

Before After

After



### CLOUD DATA TRANSFER

### AUTOMATICALLY GENERATE TREATMENT PARAMETERS

After selecting gender, treatment area, skin color, hair color, and hair density, the system will automatically generate treatment commendation parameters.






### REMOTE CONTROL SYSTEM


Remotely Control Machine On Mobile

Remotely Setting Parameters On Mobile

Remotely Create And View User Information On Mobile



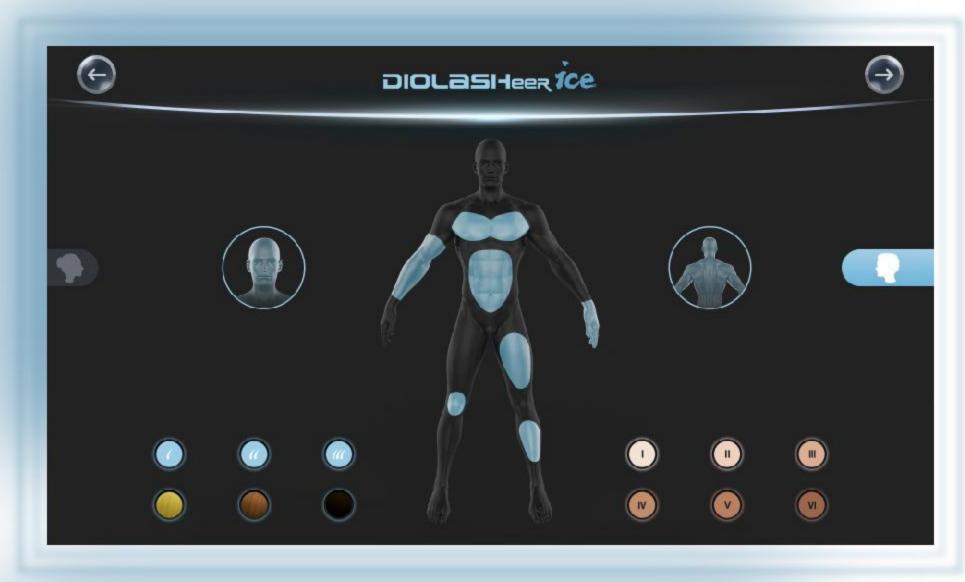

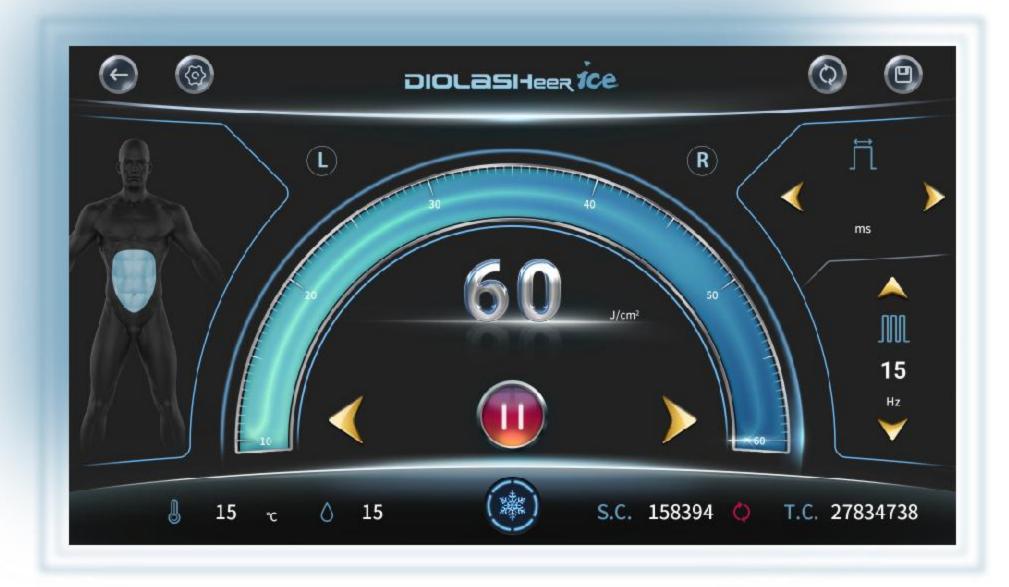

### **SPECIFICATIONS**

Power

Output Power 2000w

Wavelength 808nm 755nm 940nm 1064nm Optional

Energy Density 10-60 J/cm2 (Deviation≤±2%)

Pulse Width Range 1–200ms

Spot Size
Φ8mm 12\*14mm 12\*40mm Standard; 12\*24mm 12\*30mm Optional

Frequency 1-20hz

Cooling System

Compressor Cooling System

Voltage AC220V±10% 10A 50Hz , 110V±10% 10A 60Hz

